

## Description

HT3112 is a fully integrated motor driver control IC that integrates a lithium battery charging management module, motor driver module, motor freewheeling diodes, key gear control and multi-protection modules. Its standby current is only 5 $\mu$ A.

The chip delivers a maximum output current of 2.0A. For applications requiring higher current beyond 2.0A, an external PMOS transistor can be added to expand the driving capability.

When the MODE terminal is connected to BAT, it operates in 3-stage mode; pressing the button will switch between these stages via the sequence: 50%–75%–100%–OFF; when the MODE terminal is grounded, it operates in 1-stage mode; in this mode, pressing the button starts the device, and pressing the button again shuts it down.


## Applications

- Electric shavers, hair clippers, facial cleansing devices, portable water pumps
- Electric toothbrushes, flashlights, desk lamps


## Features

- Built-in motor freewheeling diodes
- Continuous motor driving current: 2.0 A
- Max peak current: 3 A
- Supports external PMOS for higher drive current
- Charging current up to 1 A
- Red LED on during charging; green LED on when fully charged
- Green LED on during discharge; green LED flashes under low battery
- 2.9V battery over-discharge protection
- Output over-current protection
- Motor Lock Protection
- Short-Circuit Protection
- Thermal protection
- Single-click key control for power on/off
- Package: ESOP-8

## Typical Application Circuit

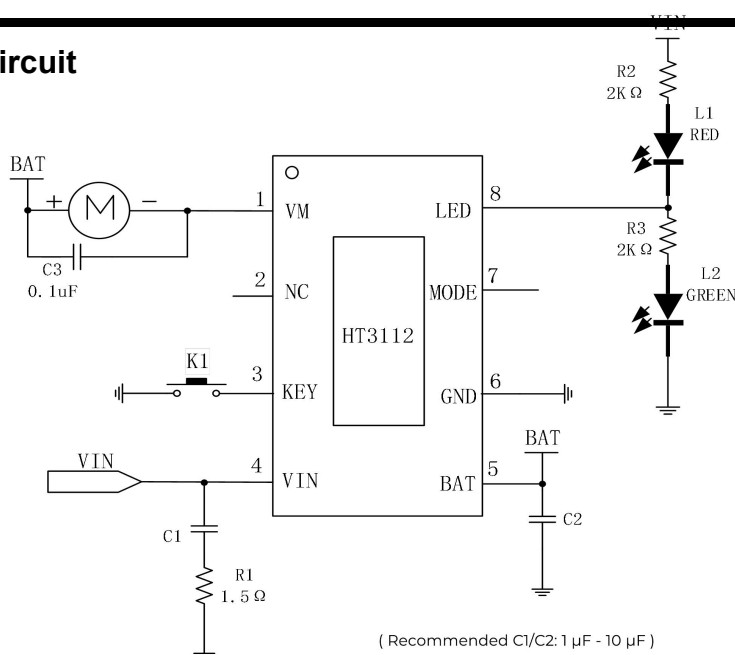

## Pin Configuration

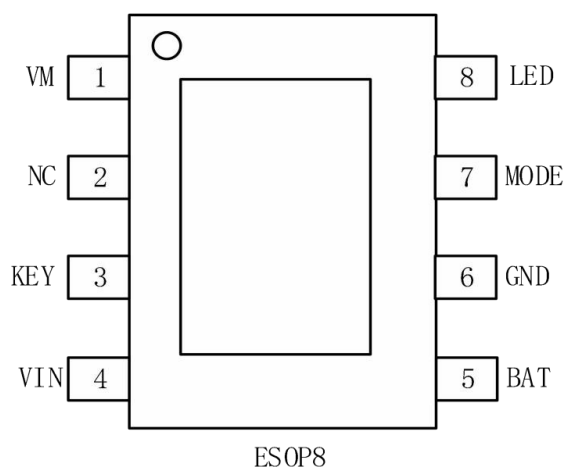

## Pin Description

| Pin No | SOP8 | Description                                                                                           |
|--------|------|-------------------------------------------------------------------------------------------------------|
| VM     | 1    | Motor Anode                                                                                           |
| NC     | 2    | No connect                                                                                            |
| KEY    | 3    | Click Switch Output                                                                                   |
| VIN    | 4    | USB charging 5V input power pin                                                                       |
| BAT    | 5    | Battery terminal, external lithium battery connection                                                 |
| GND    | 6    | Ground                                                                                                |
| MODE   | 7    | MODE pin must not be left floating. Connect to BAT for 3-speed mode, connect to GND for 1-speed mode. |
| LED    | 8    | Charging indicator, Discharging indicator, Low battery warning                                        |
| EPAD   | 0    | Heat Sink                                                                                             |

## Absolute Maximum Ratings <sup>(1)</sup>

Input Supply Voltage ..... -0.3V~6.0V  
Voltage on Other Pins ..... -0.3V~6.0V VM  
Peak Current ..... 2.6AVM  
Continuous Current ..... 1.6A  
Operating Junction Temperature (TJ) ..... -25 °C  
~ +125 °C  
Storage Temperature (TSTG) ..... -50 °C ~  
+150 °C

## Operating Range

Power Dissipation ..... 600mW  
ESD (HBM) ..... 2KV

(1) The device may be damaged if the IC operates beyond the absolute maximum ratings. Operation at absolute maximum ratings or any conditions exceeding the recommended operating conditions is not recommended. Continuous operation under absolute maximum rating conditions may degrade device reliability. Absolute maximum ratings are merely stress rating limits.

## Electrical Characteristics

(Unless otherwise specified, VIN=5V, TA=25°C)

| Parameter                                        | Test Condition                       | Min. | Typ.      | Max. | Unit |
|--------------------------------------------------|--------------------------------------|------|-----------|------|------|
| Input voltage range                              |                                      | 4.5  | 5         | 6    | V    |
| Float charging voltage output                    |                                      | -    | 4.2       | -    | V    |
| Constant charging current                        |                                      | -    | 1         | -    | A    |
| Trickle charging current                         |                                      | -    | 0.2<br>CC | -    | mA   |
| Trickle charging threshold voltage               | VBAT Raising                         | -    | 2.8       | -    | V    |
| Trickle charge hysteresis voltage                |                                      | -    | 150       | -    | mV   |
| Charging temperature limit                       |                                      | -    | 120       | -    | °C   |
| Recharge threshold                               | Input 5V , VBAT Falling              | -    | 4.0<br>5  | -    | V    |
| Discharge Low Voltage Warning Threshold          | BAT From high to low                 | -    | 3.2       | -    | V    |
| Overvoltage protection voltage                   | BAT From high to low                 | -    | 2.9       | -    | V    |
| Over-discharge release voltage                   | BAT From low to high                 | -    | 3.2       | -    | V    |
| Output overcurrent protection current            | HT3112                               | -    | 2.6       | -    | A    |
| BAT standby current                              |                                      | -    | 5         | -    | μA   |
| Output switch transistor internal resistance     | BAT=4V , I=0.5A                      | -    | 150       | -    | mΩ   |
| Discharge Overtemperature Protection Temperature | Limited to chip internal temperature | -    | 150       | -    | °C   |
| Discharge Overtemperature Protection Hysteresis  | Limited to chip internal temperature | -    | 30        | -    | °C   |

## Functional Description

### VIN Input Bypass Capacitor

When selecting a ceramic capacitor for the VIN input bypass circuit, special attention must be paid: due to their high Q-factor, ceramic capacitors may generate a high transient voltage signal during certain power-up conditions (e.g., when VCC is connected to an active power supply), which could pose a risk of damaging the chip; therefore, it is recommended to connect a  $2\Omega$  resistor in series with the input ceramic capacitor to eliminate the startup transient voltage signal.

### Charging process

HT3112 supports trickle charging, constant current charging, and constant voltage charging, as well as 0V battery charging. When the battery voltage falls below 2.8V, the chip operates in trickle charging mode, with the trickle charging current set at 0.2 times the constant current charging current; when the battery voltage exceeds 2.8V, the chip switches to constant current charging mode; when the battery voltage approaches 4.2V, the charging current gradually decreases; and when the charging current reduces to 0.1 times the constant current charging current, the charging process is completed.

### Smart Recharging

When the battery is fully charged but the 5V input remains connected, the HT3112 will monitor the voltage at the BAT pin; when the BAT pin voltage falls below the recharging threshold voltage of 4.05V, the system will initiate a new battery charge cycle. This approach prevents unnecessary repeated charging of the battery and effectively extends its service life.

### Over-temperature Protection (Chip Internal Temperature Only)

HT3112 integrates internal thermal protection function. During charging, the IC will automatically reduce charging current to stabilize chip temperature when the internal temperature exceeds  $120^{\circ}\text{C}$ . When the motor is running, the output will be shut off once the internal chip temperature reaches  $150^{\circ}\text{C}$ ; the output will be re-enabled after the temperature drops back to  $120^{\circ}\text{C}$ .

### Over-Current Protection

The IC continuously monitors the continuous current at the VM pin. If the VM current rises to the over-current protection threshold IOD, the output will be turned off. After protection triggers, the user needs to press the key again to restart the output. The typical over-current protection threshold of HT3112 is 2.6A.

## Application Information

### Status Indicator LED


The red LED lights up during charging; the red LED turns off and the green LED stays solid on when the battery is fully charged.

The green LED remains on during discharge. When the battery voltage drops below 3.2 V, the green LED flashes as a low-battery reminder until the output is shut down.


### PCB Layout Recommendations

- 1.Place the BAT capacitor as close to the IC as possible, and keep the traces from the IC to both terminals of the capacitor short and wide.
- 2.Route the motor negative terminal as close to the VM pin of the chip as possible.
- 3.Use short and wide copper traces between the battery and the BAT pin.


## Typical Applications

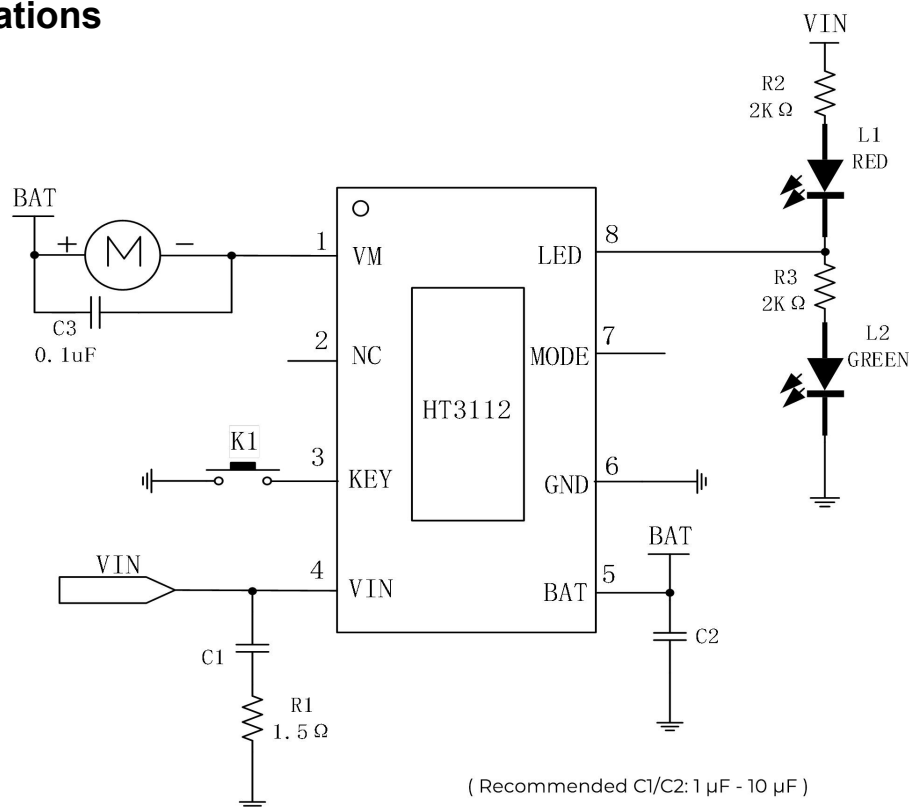

### External MOS application (applications with drive current greater than 1.6A)

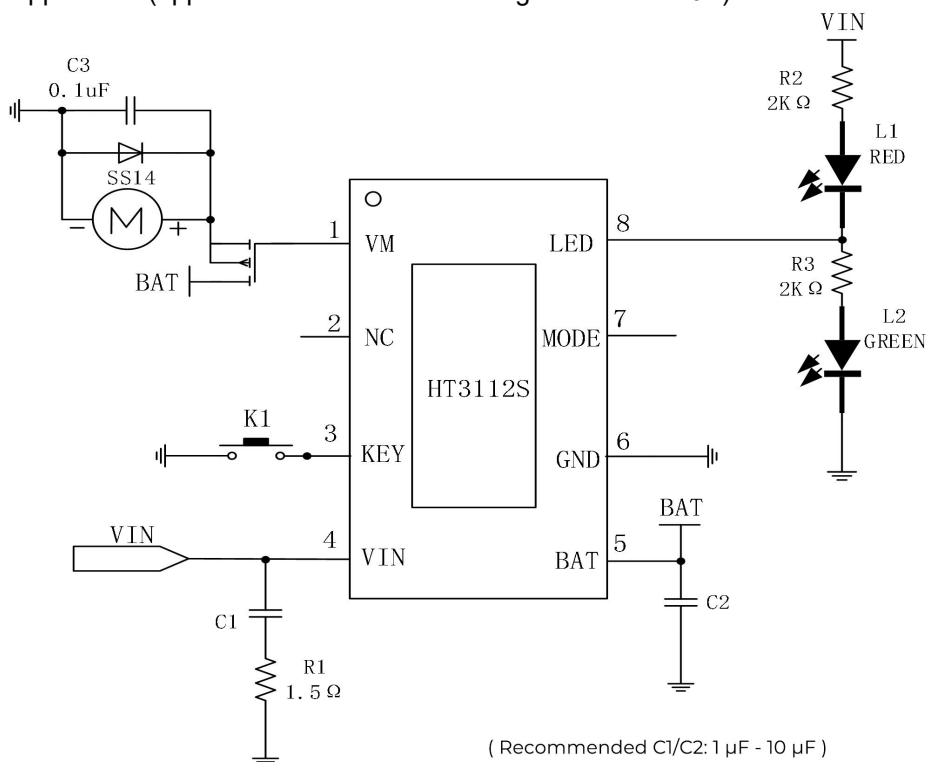

Package Size:ESOP8

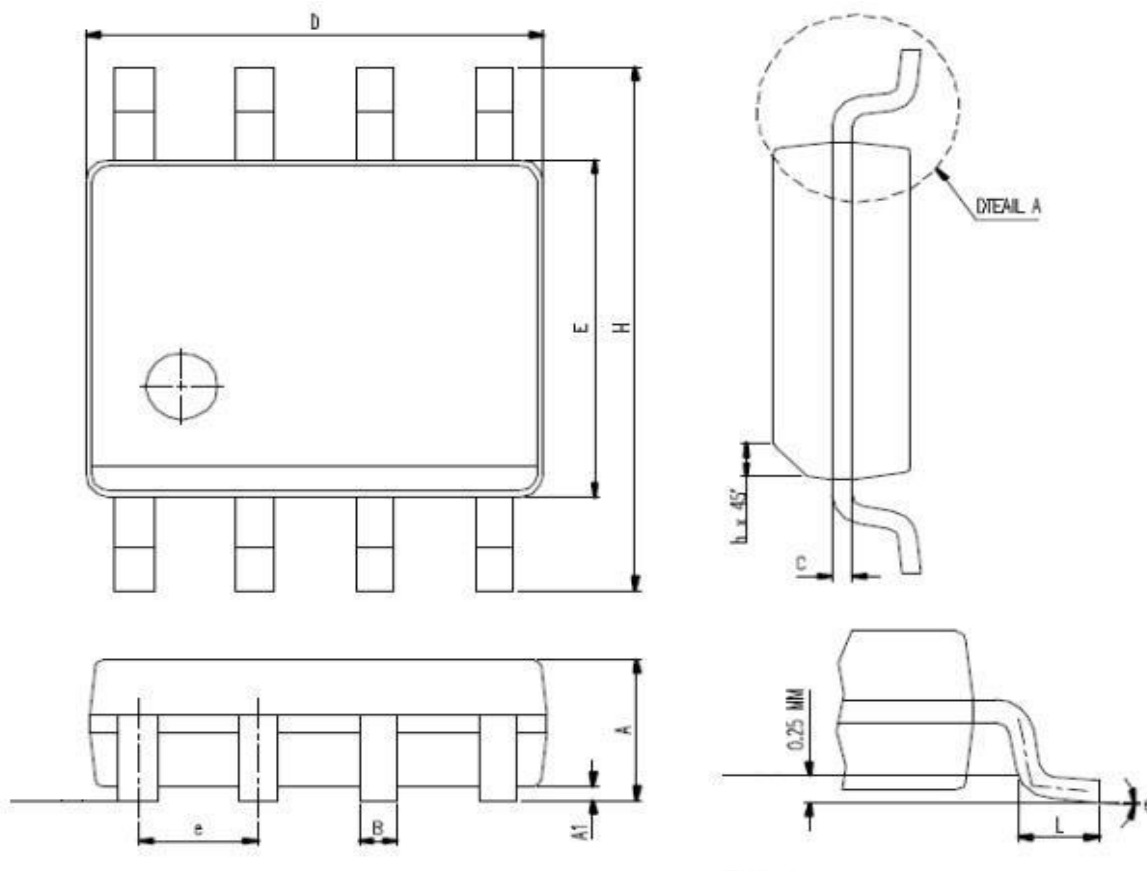

| Symbol | Dimensions In Millimeters |      | Dimensions In Inches |        |
|--------|---------------------------|------|----------------------|--------|
|        | Min                       | Max  | Min                  | Max    |
| A      | 1.35                      | 1.75 | 0.0532               | 0.0688 |
| A1     | 0.10                      | 0.25 | 0.0040               | 0.0098 |
| B      | 0.33                      | 0.51 | 0.0130               | 0.0200 |
| C      | 0.19                      | 0.25 | 0.0075               | 0.0098 |
| e      | 1.27BSC                   |      | 0.050BSC             |        |
| D      | 4.80                      | 5.00 | 0.1890               | 1.1988 |
| H      | 5.80                      | 6.20 | 0.2284               | 0.2440 |
| E      | 3.80                      | 4.00 | 0.1497               | 0.1574 |
| L      | 0.40                      | 1.27 | 0.0160               | 0.0500 |
| h      | 0.25                      | 0.50 | 0.0099               | 0.0196 |
| θ      | 0                         | 8    | 0                    | 8      |

Note: Our company reserves the right to update, upgrade and optimize the specifications of this product. Customers shall obtain the latest product specification sheet from our sales staff before trial production or placing orders.

## Disclaimer and Copyright Statement

Quanzhou Hichon Semiconductor Co., Ltd. (hereinafter referred to as “Hichon”) reserves the right of final interpretation of this product. Contents are subject to update without prior notice. Users shall update this datasheet to the latest valid version prior to product usage.

Hichon reserves the right to correct, revise and improve product specifications at any time. Customers shall verify whether the acquired information is up-to-date and complete. Hichon does not warrant that the product parameters are consistent with those stated in this document.

Reproduction of Hichon’s product manuals or datasheets is permitted only if the content is not altered, and all relevant authorizations, conditions, limitations and statements are retained. Hichon shall not bear any liability or obligation for altered documents. Reproduction of third-party information may be subject to additional restrictions.

Hichon updates this document periodically. Actual product parameters may vary depending on model and other factors. This product manual shall not constitute any express or implied warranty or license.

All test data contained in this manual are obtained from Hichon’s laboratory tests, which may differ slightly from actual application results at the customer’s end. This manual serves solely as a usage guideline. Hichon assumes no obligations for application support or customer product design. Customers shall be solely responsible for the use and application of Hichon’s products and conduct sufficient verification on design and operational safety.

Customers shall perform adequate verification on design and operational safety to mitigate risks associated with their products and applications. Customers shall independently comply with all applicable laws, regulations and safety requirements relevant to their products and the deployment of Hichon’s products within their applications.